



The Kohler® Advantage

- **High Quality Power**
Home generators provide advanced voltage and frequency regulation along with ultra-low levels of harmonic distortion for excellent generator power quality to protect your valuable electronics.
- **Premium 5-yr/2000-hr Limited Warranty Included**
Kohler is known for extraordinary reliability and performance. Kohler's premium limited warranty covers parts, labor, and travel for the full warranty period.
- **Powerful Performance**
Exclusive Powerboost™ technology provides excellent starting power. §
- **Aluminum Enclosure**
 - Attractive aluminum enclosure allows installation as close as 18 inches from your home or small business. †
 - Enclosure panels can be removed without tools to allow easy access for maintenance and service.
- **Enclosure Options** for single-phase units
 - **Kohler® Exclusive Colors** are available. Go to homeenergy.kohlerenergy.com to see the latest colors.
 - **Camouflage Enclosures** are available for single-phase units (optional). Go to [homeenergy.kohlerenergy.com /MossyOak](http://homeenergy.kohlerenergy.com/MossyOak) to view the available patterns.

Mossy Oak is a trademark used under license from Haas Outdoors, Inc., by Kohler Co.

Standard Features

- **RDC2 Controller**
 - One digital controller manages both the generator set and transfer switch functions (with optional Model RXT).
 - Electronic speed control responds quickly to varying demand.
 - OnCue® Plus Generator Management System for remote monitoring is included with the generator.
- **Command PRO Engine Features**
 - Command PRO® OHV engine with hydraulic valve lifters for reliable performance without routine valve adjustment or lengthy break-in requirements.
- **Designed for Easy Installation**
 - Sturdy aluminum base can be mounted on gravel or a concrete mounting pad.
 - Fuel and electrical connections through the enclosure wall eliminate the need for stub-ups through the base.
 - Customer connection terminal block located near the controller allows easy access for field wiring.
 - Designed for outdoor installation only.
- **Certifications**
 - Meets emission regulations for U.S. Environmental Protection Agency (EPA) with both natural gas and LPG.
 - cULus listed.
 - Accepted by the Massachusetts Board of Registration of Plumbers and Gas Fitters.
 - Meets 181 mph wind rating.
- **Approved for stationary standby applications** in locations served by a reliable utility source (on-grid).
- **Exercise Modes**
 - EcoExercise, unloaded, with system diagnostics (90 seconds). Reduces fuel costs and minimizes sound disruption.
 - Unloaded exercise with complete system diagnostics (20 minutes).
 - Unloaded full-speed exercise (20 minutes).
 - Loaded full-speed exercise (20 minutes; Model RXT ATS required).
 - Weekly, bi-weekly, or new monthly exercise intervals.
- Model 26RCAL includes a model RXT automatic transfer switch. See last page for more details.

Generator Ratings

Model	Alt.	Ph.	Volts	Standby Ratings, 60 Hz				Standby Ratings, 50 Hz				Line Circuit Breaker				
				Natural Gas		LPG		Natural Gas		LPG						
				kW/ kVA	A	kW/ kVA	A	kW/ kVA	A	kW/ kVA	A	A	Poles			
26RCA/L	2F8	1	120/240	24/24	100	26/26	109	110	2	115/230	18/18	78	18/18	78	80	2
		3	120/208	21/26	73	22/27	77	80	3	220/380	16/20	30	16/20	30	30	3
26RCA	2G8	3	120/240	21/26	64	22/27	67	80	3	230/400	16/20	29	16/20	29	30	3
		3	277/480	21/26	32	22/27	34	40	3	240/416	16/20	28	16/20	28	30	3

Note: The line circuit breaker is automatically selected based on the generator set model and voltage configuration.

RATINGS: Standby ratings apply to installations served by a reliable utility source. All single-phase units are rated at 1.0 power factor. The standby rating is applicable to variable loads with an average load factor of 80% for the duration of the power outage. No overload capacity is specified at this rating. Ratings are in accordance with ISO-3046/1, BS5514, AS2789, and DIN 6271. GENERAL GUIDELINES FOR DERATING: ALTITUDE: Derate 4% per 305 m (1000 ft.) elevation above 153 m (500 ft.). TEMPERATURE: Derate 2% per 5.5°C (10°F) temperature increase above 16°C (60°F). Availability is subject to change without notice. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler Co. generator dealer for availability.

§ Check the appliance manufacturer's specifications for actual power requirements. Consult a Kohler® Power Systems professional to calculate your exact residential power system requirements.

† Meets NFPA guidelines for 18 inch clearance to combustible materials. Check state and local codes for minimum distance required from a structure.

Alternator Specifications

Alternator Specifications

Specifications	Alternator
Manufacturer	Kohler
Type	2-Pole, Rotating Field
Leads, quantity	
2F8	4
2G8	12
Voltage regulator	Digital
Insulation:	NEMA MG1-1.66
Material	Class H
Temperature rise	130°C Standby
Bearing: quantity, type	1, Sealed
Coupling	Direct
Amortisseur windings	Full
Voltage regulation, no-load to full-load RMS	±1.0%
One-step load acceptance	100% of Rating
Peak motor starting kVA: (35% dip for voltages below)	
240 V, 1 ph, 2F8 (4 lead)	39 (60 Hz) 27 (50 Hz)
240 or 480 V, 3 ph, 2G8 (12 lead)	63 (60 Hz) 50 (50 Hz)

Alternator Features

- Compliance with NEMA, IEEE, and ANSI standards for temperature rise.
- Self-ventilated and drip-proof construction.
- Windings are vacuum-impregnated with epoxy varnish for dependability and long life.
- Superior voltage waveform and minimum harmonic distortion from skewed alternator construction.
- Digital voltage regulator with ±1.0% no-load to full-load RMS regulation.
- Rotating-field alternator with static exciter for excellent load response.
- Total harmonic distortion (THD) from no load to full load with a linear load is less than 5%.

Application Data

Engine

Engine Specifications	60 Hz	50 Hz
Manufacturer	Kohler	
Engine: model, type	CH1006 4-Cycle	
Cylinder arrangement	V-2	
Displacement, cm ³ (cu. in.)	999 (61)	
Bore and stroke, mm (in.)	90 x 78.5 (3.54 x 3.1)	
Compression ratio	10.5:1	
Main bearings: quantity, type	2, Heavy-Duty Sleeve Bearings	
Rated RPM	3600	3000
Max. engine power at rated RPM, kW (HP)		
LPG	26.1 (36.4)	22.7 (30.4)
Natural gas	24.5 (33.0)	19.5 (26.2)
Cylinder head material	Aluminum	
Valve material	Steel/Stellite®	
Piston type and material	Aluminum Alloy	
Crankshaft material	Heat Treated, Ductile Iron	
Governor: type	Electronic	
Frequency regulation, no load to full load	Isochronous	
Frequency regulation, steady state	±0.5%	
Air cleaner type	Dry	

Engine Electrical

Engine Electrical System	
Ignition system	Electronic, Capacitive Discharge
Starter motor rated voltage (DC)	12
Battery (purchased separately):	
Ground	Negative
Volts (DC)	12
Battery quantity	1
Recommended cold cranking amps:	
(CCA) rating for -18°C (0°F)	500
Group size	51

Exhaust

Exhaust System	
Exhaust temperature exiting the enclosure at rated kW, dry, °C (°F)	260 (500)

Lubrication

Lubricating System	
Type	Full Pressure
Oil capacity (with filter), L (qt.) §	1.9 (2.0)
Oil filter: quantity, type §	1, Cartridge
Oil cooler	Integral

§ Kohler recommends the use of Kohler Genuine oil and filters.

Fuel Requirements

Fuel System	
Fuel types	Natural Gas or LPG
Fuel supply inlet	3/4 NPT
Fuel supply pressure, kPa (in. H ₂ O):	
Natural gas	0.9-2.7 (3.5-11)
LP	1.7-2.7 (7-11)

Fuel Composition Limits *	Nat. Gas	LPG
Methane, % by volume (minimum)	90 min.	—
Ethane, % by volume (maximum)	4.0 max.	—
Propane, % by volume	1.0 max.	85 min.
Propene, % by volume (maximum)	0.1 max.	5.0 max.
C ₄ and higher, % by volume	0.3 max.	2.5 max.
Sulfur, ppm mass (maximum)	25 max.	
Lower heating value, MJ/m ³ (Btu/ft ³), (minimum)	33.2 (890)	84.2 (2260)

* Contact your local dealer for suitability and rating derates based on fuel compositions outside these limits.

Fuel Pipe Size

Minimum Gas Pipe Size Recommendation, in. NPT			
Pipe Length, m (ft.)	Natural Gas 290,000 Btu/hr.	LPG 322,500 Btu/hr.	
8 (25)	1	3/4	
15 (50)	1 1/4	1	
30 (100)	1 1/4	1	
46 (150)	1 1/4	1	
61 (200)	1 1/2	1 1/4	

Generator Set Sound Data

Model 26RCA sound levels are 56 dB(A) during engine exercise and 67 dB(A) during full-speed generator diagnostics and normal operation.*

All sound levels are measured at a distance of 23 ft. (7 m) from the generator set.

* Lowest of 8 points measured around the generator. Sound levels at other points around generator may vary depending on installation parameters.


Operation Requirements

Fuel Consumption, m ³ /hr. (cfh) @ 60Hz				
% Load	Natural Gas		LPG	
100	8.2	(290)	3.6	(129)
75	6.7	(238)	3.1	(111)
50	5.1	(180)	2.4	(85)
25	3.9	(137)	1.8	(64)
Exercise	1.9	(67)	0.9	(31)

Fuel Consumption, m ³ /hr. (cfh) @ 50Hz				
% Load	Natural Gas		LPG	
100	6.9	(245)	2.9	(102)
75	6.2	(220)	2.5	(89)
50	5.4	(190)	1.8	(65)
25	3.7	(131)	1.3	(46)
Exercise	1.9	(67)	0.9	(31)

Nominal fuel rating: Natural gas: 37 MJ/m³ (1000 Btu/ft.³)
LPG: 93 MJ/m³ (2500 Btu/ft.³)
LPG conversion factors: 8.58 ft.³ = 1 lb.
0.535 m³ = 1 kg
36.39 ft.³ = 1 gal.

RDC2 Controller Features

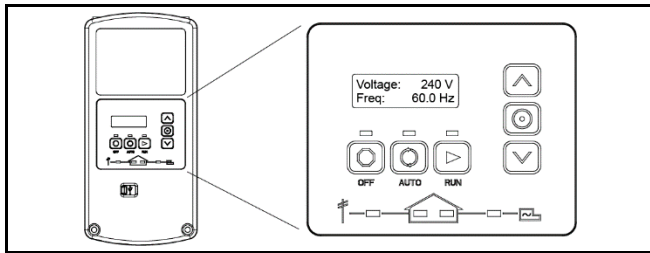

The RDC2 controller provides integrated control for the generator set, Kohler® Model RXT transfer switch, programmable interface module (PIM), and load shed kit.

- Membrane keypad:
 - OFF, AUTO, and RUN pushbuttons
 - Select and arrow buttons for access to system configuration and adjustment menus
- LED indicators for OFF, AUTO, and RUN modes
- LED indicators for utility power and generator set source availability and ATS position (Model RXT transfer switch required)
- LCD display:
 - Two lines x 16 characters per line
 - Backlit display with adjustable contrast for excellent visibility in all lighting conditions
- Scrolling system status display:
 - Generator set status
 - Voltage and frequency
 - Engine temperature
 - Oil pressure
 - Battery voltage
 - Engine runtime hours
- Date and time displays
- Smart engine cooldown senses engine temperature
- Digital isochronous governor maintains steady-state speed at all loads
- Digital voltage regulation: ±1.0% RMS no-load to full-load
- Automatic start with programmed cranking cycle
- Built-in 2.5 amp battery charger
- Programmable exerciser can be set to start automatically on any future day and time
- Exercise modes:
 - New 90-second Eco Exercise with complete system diagnostics (factory default setting)
 - Lowers fuel cost
 - Minimizes sound disruption
 - In cold temperatures, limits condensation build-up in the crankcase
 - Unloaded 20-minute exercise with complete system diagnostics
 - Unloaded 20-minute full-speed exercise
 - Loaded 20-minute full-speed exercise (Model RXT ATS required)
- Weekly, bi-weekly, or new monthly exercise intervals
- Front-access mini USB connector for SiteTech™ or USB Utility connection
- Integral Ethernet connector for Kohler® OnCue® Plus
- Remote two-wire start/stop capability for optional connection of a Model RDT transfer switch
- Diagnostic messages: Displays diagnostic messages for the engine, generator, Model RXT transfer switch, programmable interface module (PIM), and load management device.
- Maintenance reminders
- System settings:
 - System voltage, frequency, and phase
 - Voltage adjustment
 - Measurement system, English, or metric
- ATS status (Model RXT ATS required):
 - Source availability
 - ATS position (normal/utility or emergency/generator)
 - Source voltage and frequency
- ATS control (Model RXT ATS required):
 - Source voltage and frequency settings
 - Engine start time delay
 - Transfer time delays
 - Voltage calibration
 - Fixed pickup and dropout settings
- Programmable Interface Module (PIM) status displays:
 - Input status (active/inactive)
 - Output status (active/inactive)
- Load control menus:
 - Load status
 - Test function

Generator Set Standard Features

- Aluminum sound enclosure (cashmere color standard)
- Battery cables
- Critical silencer
- EPA certified fuel system
- Field-connection terminal block
- Fuel solenoid valve and secondary regulator
- Line circuit breaker
- Multi-fuel system, LPG/natural gas, field-convertible
- Oil drain extension with shutoff valve
- Oil level sensor
- Oil pressure sensor
- OnCue® Plus Generator Management System
- Premium 5-year/2000 hour limited standby warranty. Covers parts, labor, and travel for the entire warranty period
- RDC2 generator set/ATS controller
- Rodent-resistant construction
- Sound-deadening, flame-retardant foam per UL 94, class HF-1

Available Options

Concrete Mounting Pads

- Concrete mounting pad, 3 in. thick
- Concrete mounting pad, 4 in. thick (recommended for storm-prone areas)

Electrical Accessories

- Battery
- Battery heater, 120 VAC *
- Carburetor heater, 120 VAC †
- Cold weather kit, 120 VAC ††
 - Includes oil and breather tube heaters, fuel regulator heater, and pressure sensor cover
 - QS model with factory-installed kit is available
- Emergency stop kit
- Programmable interface module (PIM) (provides 2 digital inputs and 6 relay outputs)

* Battery heater is recommended below -17°C (0°F).

† Do not use a carburetor heater with a cold weather kit.

†† Cold weather kit is recommended below 0°C (32°F).

Enclosure Options (single-phase only)

- Kohler® Exclusive Colors
Go to homeenergy.kohlerenergy.com to see the latest colors.
- Mossy Oak® camouflage enclosures
Go to homeenergy.kohlerenergy.com/MossyOak to see available patterns.

Mossy Oak is a trademark used under license from Haas Outdoors, Inc., by Kohler Co.

Fuel System Accessories

- Flexible fuel line (included on QS models)

Literature

- General maintenance literature kit
- Overhaul literature kit
- Production literature kit

Maintenance

- Maintenance kit (includes air filter, oil, oil filter, and spark plugs)
- Premium 300 hour/2 year oil for fewer oil changes

Automatic Transfer Switches and Accessories

- Model RDT ATS
- Model RXT ATS with combined interface/load management board
- Load shed kit for RXT or RDT
- Power relay modules (use up to 4 relay modules for each load management device)

26RCAL Model Package

- 26RCAL with 200 amp service entrance-rated Model RXT with combined interface/load management board and corrosion-resistant NEMA 3R aluminum enclosure

Warranty


- 7-Year Limited Warranty
- 10-Year Limited Warranty

Warranties cover parts, labor, and travel for the entire warranty period.

Generator Set Dimensions and Weights

Generator Set Size, L x W x H: 1193 x 660 x 820 mm (47 x 26.0 x 32.3 in.)

Shipping Weights:
 26RCA Generator Set: 283 kg (625 lb.)
 26RCAL with 200 A RXT SE ATS: 304 kg (670 lb.)

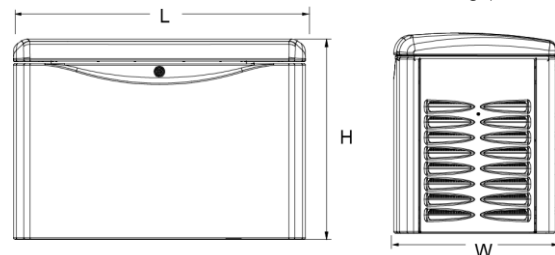

NOTE: Dimensions are provided for reference only and should not be used for planning installation. Contact your local dealer for more detailed information.

DISTRIBUTED BY:

Adirondack Generators, LLC
 164 Harrison Street
 Johnstown NY 12095
 (518) 224-1492
www.adirondackgenerators.com

© 2024 - Discovery Energy, LLC - All rights reserved.